


DYNTEK FibreMesh Roll (Self-Adhesive)

Dyntek FibreMesh Roll(Self Adhesive) is widely used in drywall and AAC (autoclaved-aerated concrete) blockwork applications such as joints, corners and crack repairs.

Manufactured from fibreglass, it is woven into mesh size of 5mm x 5mm and coated with anti-alkali resin and contact adhesive.

Benefits:

Dyntek FibreMesh Roll is strong and convenient to apply. Its use enhances bonding of skim coat plaster and reinforces drywall joint.

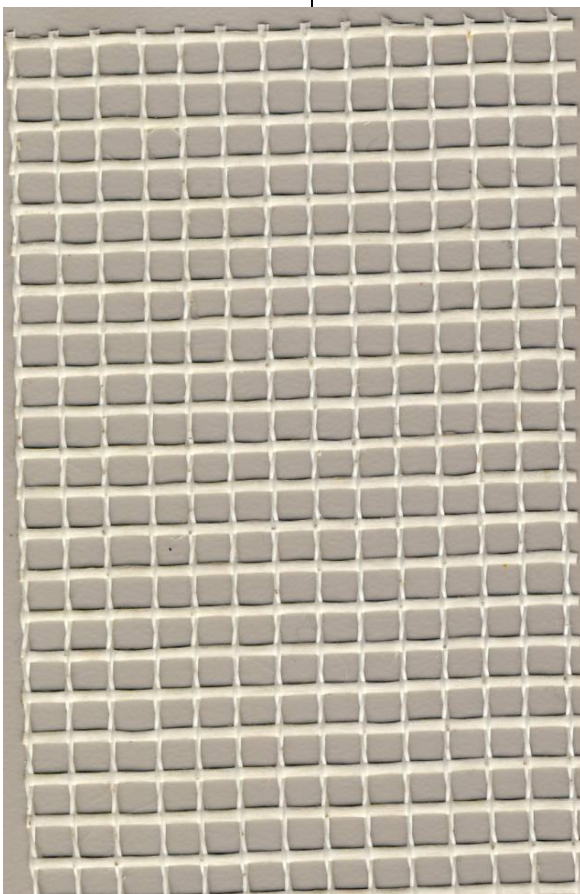

Product Code	Roll Width* (mm)	Roll Length** (m)
FMA150/150	150	49.5

Product Data

• Material		Glass filament
• Model of raw yarn	Warp	130 tex
	Weft	400 tex
• Weave		Union
• Mesh Spacing		5.0mm x 5.0mm
• Mesh Weight		165g/m ² ± 3g
• Tensile Strength	Warp	1300N/50mm
	Weft	1450N/50mm